Performance specification	
Satellite signals tracked simultaneously	GPS L1C/A, L1C, L2P(Y), L2C, L5 GLONASS L1, L2, L3 BEIDOU B1I, B2I, B3I, B1C, B2a, B2b GALILEO E1, E5a, E5b,E6 QZSS L1, L2, L5, L6 SBAS L1, L5 IRNSS L5
Channels	1408 tracking Channels
Cold start	<60 s
Hot start	<15 s
Positioning output rate	1Hz - 20Hz
Signal Reacquisition	<1 s
RTK Initialization time	<10s
Initialization Reliability	>99.99%
Time accuracy	20 ns
Positioning	
Code differential GNSS positioning	Horizontal 0.25 m + 1 ppm RMS Vertical 0.50 m + 1 ppm RMS
Static GNSS surveying	SBAS differential positioning accuracy2 Typically <5m 3DRMS Horizontal 2.5 mm + 0.5 ppm RMS Vertical 5 mm + 0.5 ppm RMS
Real Time Kinematic Surveying	
Single Baseline < 30 KM	Horizontal 8 mm + 1 ppm RMS Vertical 15 mm + 1ppm RMS
Network RTK[3]	Horizontal 8 mm + 0.5 ppm RMS Vertical 15 mm + 0.5 ppm RMS
Laser survey	± 5cm + 5m/sin( ) TR height less than 30 [1]
HARDWARE	
PHYSICAL	
Material	Magnesium alloy
Dimension	154mm(diameter) x 80mm(without bottom connector)(mm)
weight	0.78kg
Operating temperature	-40℃ to + 75℃
Storage temperature	-55℃ to + 85℃
Protection IP	IP67 dust proof, protected from 30min immersion to depth of 1m
Shock	Survive 2m pole drop onto concrete
Vibration	MIL-STD-810G
Humidity	100%, condensing

ELECTRICAL	
Power	9~24 V DC external power input on 5-pin LEMO port
Battery	Support USB Type-C fast charging
Battery Life	Internal 7000mAh 7.4V lithium-ion battery Rover Mode: 12 hours Base Mode: 7 hours Static Mode: 15 hours
Communication & Data Storage	
I/O interface	
LEMO port (5pin)	Supports power input, serial port control, and external radio communication
USB Type-C port	Data download / Charging
Sim card slot	Supports Nano-SIM
Antenna port	SMP antenna interface
Radio modem	
Transmit power	1/2.5w switchable
Frequency band	410MHz-470MHz, supports to set the frequency
Protocols	TrimTalk450s, SOUTH, SatelLITC-EOT
Cellular	
4G	Integrated full frequency multi band 4G modem, supports WCDMA/CDMA2000/TD-SCDMA/TD-LTE/FDD-LTE
WIFI	
AP	802.11 b/g standard, access point & client mode, supports access to hotspot for connection transmission
Others	
Bluetooth	Bluetooth 5.2 Classic/BLE Proprietary, Double mode
Data format	
Output	RTCM3.3, RTCM3.x, CMR & CMR+, u-blox
Input	RINEX, NMEA outputs
Storage	
Internal memory	64GB internal memory, supports cyclic storage, with ability to collect static raw data observation based on 5 seconds interval
Camera	
AR	Support high-resolution camera with large viewing angle and support for live scene rolling
Laser assisted	5M high-definition camera, large viewing angle, auxiliary laser measurement and aiming
System Integration	
OS system	Intelligent LINUX operating system
Tilt Compensation	Tilt-free use in 120°(Calibration free)
Supported controllers	All android devices with supported software
Design	
button	Power key
Indicator	Power indicator, data link indicator, satellite indicator, Bluetooth indicator
Voice	Support voice prompts
WEB UI	Support WEBUI configuration

GUANGZHOU ALPHA GEO INFO CO.,LTD
Address: Building No.1, Gangu Road No.68, Tianhe District, Guangzhou City, Guangdong, China
Website: www.alphageoinfo.com
Email: alphageo@alyun.com
Phone: +86 18661149475

TOPO TRADE
Strada IACOB NEGRUZZI
nr. 44, 011094, Bucuresti-1
(+40) 722 620 305
email: topotrade@yahoo.com
www.topotrade.ro

AR

Right to the point with AR real scene stakeout

When the stakeout points are marked directly on the ground, surveyors can easily find the exact location of the stakeout points. By following the arrows on the real-life map, you can stake out points in one go, without having to move the pole back and forth, making the stakeout work more accurate and efficient.

LASER

Laser survey opens a new mode of measurement

The world's exclusive patented laser coordinate measurement quick calibration technology can easily achieve centimeter-level measurement accuracy, making measurement more accurate and user-friendly. Besides the camera used in the equipment overcomes the difficulty of aiming under sunlight, making field measurement operations faster and more efficient.

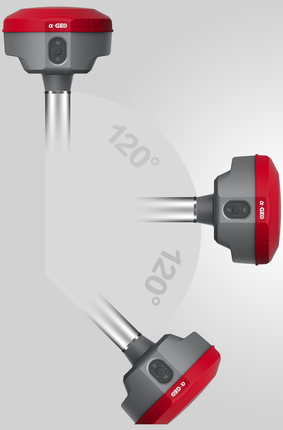

SUPER IMU

Super IMU, say goodbye to repeated initialization

Matrix II is equipped with a fast initialization, calibration free and immune to magnetic interference inertial Measurement Unit (IMU). All users can use this technology to collect or stakeout topo points up to 120°

MULTI CONSTELLATION

Matrix II with its 1408 channels new generation full GNSS chipset ability to support multiple satellite constellation including GPS, GLONASS, BEIDOU, GALILEO, OZSS, SBAS and IRNSS provides precise and accurate spatial data for all users around the world.



64GB SSD

worry-free storage

Built-in 64GB memory, which can meet most needs of field work. And the feature of cyclic storage helps receiver to automatically remove the previous observation data while there is not enough space in the memory, with this excellent performance, data storage can last almost 4 years based on 5s sampling interval. And the design of embedded memory chip can ensure the safety of observation data.

TOPO TRADE
Strada IACOB NEGRUZZI
nr. 44, 011094, Bucuresti-1
(+40) 722 620 305
email: topotrade@yahoo.com
www.topotrade.ro