

Wide Angle Reflecting Prism ZERO220 series

Z-220 / Z-220P


CREATE A NEW FROM ZERO

ZERO series are developed based on efficiency.



Z-220

Z-220P

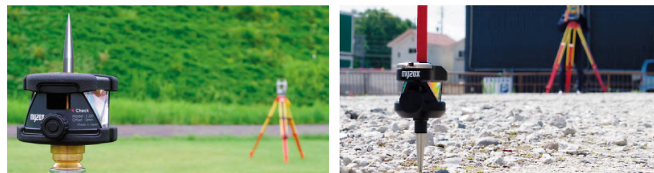


View port
for prism height

Replaceable by
independent prisms

for $\phi 9\text{mm}$ pole

RELATED PRODUCTS

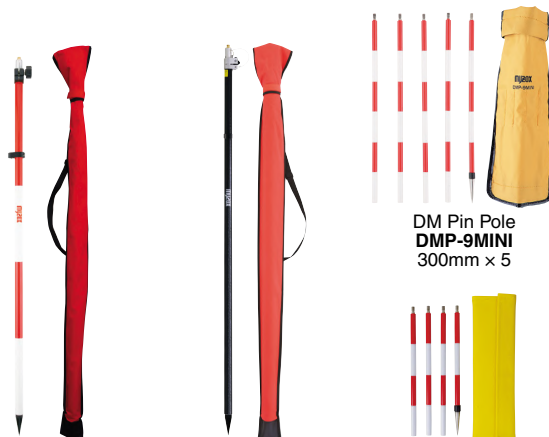

Aluminium Prism Pole
PP-260
2,600mm

Carbon Fiber Pole
RCP-260
2,600mm


DM Pin Pole
DMP-9/20
200mm $\times$ 4

FEATURES

- Prism constant 0mm
It prevents from measuring in error.
- Replaceable independent prisms
Non-glued independent prisms are replaceable at a minimum loss when one of them is broken.
- View port
For accurate measuring, the prism center height is checkable from back side.
- Height adjustable
Easy to adjust the height with slidable structure.


SPECIFICATIONS

Model	Z-220	Z-220P
Prism constant	0mm	0mm
Targetable angle	H : 220° V : $\pm 15^\circ$	H : 220° V : $\pm 15^\circ$
Circular level	46' / 2mm (PC-40L)	40' / 2mm (built-in)
Dimensions	93 $\times$ 82 $\times$ 60mm	45 $\times$ 65 $\times$ 50mm
Weight	196g	137g

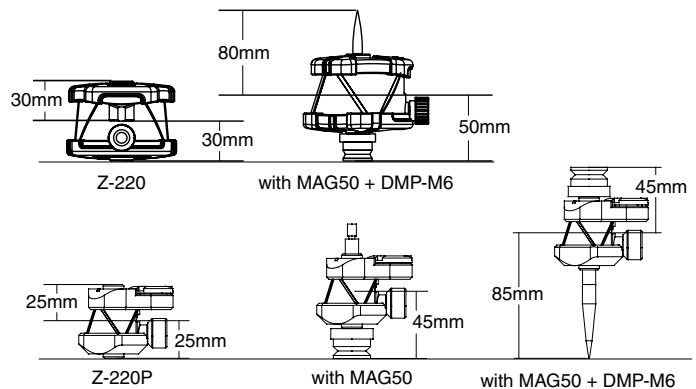

SET CONTENTS

- Prism
- Prism protection cover
- Pole adapter (MAG50)
- Shoe for DM pin pole (DMP-M6)
- Circular level
Z-220 : PC-40L
Z-220P : Built-in
- Hexagonal wrench *Z-220P only
- Case
- Manual

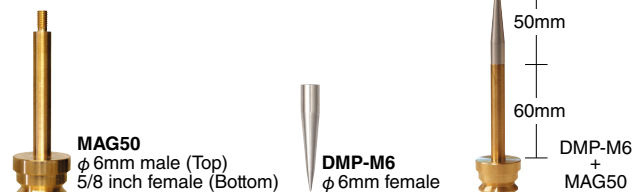

OPTION (for Z-220P)



Leica Pole Adapter
LSP100
Dimensions : 25 $\times$ 27 $\times$ 122mm
Weight : 67g
Screw (Top) : $\phi 6\text{mm}$ male
Screw (Bottom) : Spigot



Product Link
Z-220



Product Link
Z-220P